

Signal Towers / Completely pre-assembled Signal Towers

eSIGN 9 Segments with Siren BK



Part No.:	657.100.55		RoHS ₂		UK
Series:	eSIGN	7	KOH52	c QL) us	CA

MECHANICAL DATA		
Height	271 mm	
Diameter	72 mm	
Materials	PC	
Dome colour	Tranclucent	
Housing colour	Black	
Protection category	IP66 IP69K	
Connection	M12 plug 8-pole	
Working temperature minimum	-30°C	
Working temperature maximum	+60°C	
Weight with packaging	614 g	
Product weight	569 g	
IK-Code (IEC 62262)	IK08	

ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	DC	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Rated operational current	405 mA	
Rated inrush current	800 mA	
Protection class	Protection class 3	
Pollution degree	3	
Overvoltage category	I	
Isolation voltage	Ui = 50V / Uimp = 330V	
Request to external PSU	SELV/PELV	
connectivity	Digital entrance USB	

OPTICAL DATA	
Light source	LED
Light colour	MC >1.000.000 colours
Optical signal image	Blink Double flash Flash Permanent Revolving Triple flash
Blink frequency	Configurable
Service life optical	50,000 h maximum

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Signal Towers / Completely pre-assembled Signal Towers

eSIGN 9 Segments with Siren BK

ACOUSTIC DATA				
Volume (max) at 1m distance	105 dB			
Acoustic signal image	Multi-tone			
Number of tones	10 tone			
Acoustic service life	5,000 h minimum			


APPROVAL DATA			
Conforms with CE	Yes		
WEEE	Yes		
Conforms with ATEX-directive	No		
Conforms with CCC-Ex	No		
Conforms with CCC	No		
Conforms with UL	cULus		
UL Type Rating	Type 4/4X/12/13		
Conforms with FCC	No		
Conforms with IC	No		
EAC certificate available	No		
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)		
Conforms with CMIM	No		
Conforms with AS-I	No		
Conforms with DNV	No		
Conforms with RoHS CN	No		
Conforms with VdS	No		
MTTF-value [years]	39		

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Signal Towers / Completely pre-assembled Signal Towers

eSIGN 9 Segments with Siren BK

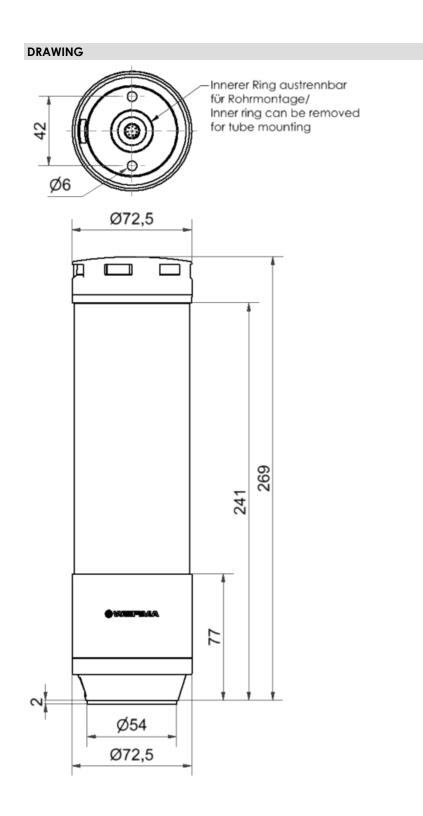

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.